

The following changes to the tender documents are effective immediately. This addendum will form part of the contract.

Specifications:

Section 00 21 14 Owner Supplied Material and Equipment

Clarification:

Estimated Material Shipping Dates Are As Per Attached Sheet:

Drawing E-06

Clarification:

Panel N-1 (70 Amp ATB Sub-Feed) is split at the Air Terminal Building to feed the adjacent Residence Trailer. See attached Photos.

Allow for temporary power to feed Residence Trailer during electrical service change-out at the Airport Shed Building.

End of Addendum # 2 (3-Sheets Attached)

Any questions please contact:

Integrated Airport Systems Ltd.

Paul Ouwerkerk

Ph: (780) 418-3054

Cell: (780) 915-4062


Email: iasl@shaw.ca



Integrated Airport Systems Ltd.

Elk Point Airport (CEJ6) AFL - Material And Equip. Supplied By Owner (Proj # IASL 221E)

Item #	Part Number	Quantity	Description	Colour	Est. Shipping Date
LED Edge Lighting (Runway 08-26, Twy A, Apron I)					
1	EMIS2RG05SC0000	12	Threshold Edge Lights	Green / Red	Aug 21st, 2018
2	EMIS2WY05S00000	28	RWY Edge Lights	White / Yellow	Aug 21st, 2018
3	EMIS2WW05S00000	16	RWY Edge Lights	White / White	Aug 21st, 2018
4	ETES/1410	17	TWY Edge Lights	Blue / Blue	Aug 21st, 2018
5	ETES/5410	4	Apron Edge Lights	Yellow / Yellow	Aug 21st, 2018
6	Total	77			
Transformers / Connectors / Heat Shrinks / Markers					
8	CTAG010666-01	77	10/15W Isolating Transformer 50/60HZ CSA	Black	Oct 18th, 2018
9	54SUPER	87	Super 54 Primary Connector Kits	Black	July 18th, 2018
10	APL-L823A	174	Heat Shrinks - Partial Sealant	Black	July 18th, 2018
11	61A0281	77	1" to 2" Couplings (Included with fixtures above)	Yellow	Sept 19th, 2018
12	ReIm 1200	80	Runway Edge Light Markers	Orange	Aug 21st, 2018
LED Windsocks (Runway 08 & 26)					
14	CTAG200666-01	2	200W Isolating Transformer 50/60HZ CSA	Black	Aug 22nd, 2018
15	54SUPER	4	54 Super Connectors Z4-Z4 Primary	Black	July 18th, 2018
16	APL-L823A	8	Heat Shrinks - Partial Sealant	Black	July 18th, 2018
17	SAT8911-LC	2	LED Windsock Towers C/W 36" X 12' Socks	Orange	Aug 21st, 2018
18	WS1236-NL	2	36" x 12' Wind Socks	Orange / White	July 18th, 2018
19	C23-040002	2	Frangible Windsock Anchor bolt Kits (Fuse Bolts)	N/A	July 10th, 2018
Guidance Signs (Provisional Items)					
21	Taxiway Hold	2	Refurbished Guidance Sign C/W Legs	Black	July 1st, 2018
22	Runway Exit	2	Refurbished Guidance Sign C/W Legs	Black	July 1st, 2018
23	CTAG200666-01	4	200W Isolating Transformer 50/60HZ CSA	Black	Aug 22nd, 2018
24	54SUPER	4	54 Super Connectors Z4-Z4 Primary	Black	July 18th, 2018
25	APL-L823A	8	Heat Shrinks - Partial Sealant	Black	July 18th, 2018
26	95MPR7G-3	4	Secondary Cable Extension - 3M	Black	July 25th, 2018
Pullpits And Transformer Hangars					
28	Edge Lights	72	PullPits C/W Metal Covers (50mm Welded Coupling)	White	July 1st, 2018
29	Edge Lights	5	PullPits C/W Metal Covers (Dual 50mm Welded Couplings)	White	July 1st, 2018
30	Windsocks	2	PullPits C/W Metal Covers (Blank)	White	July 1st, 2018
31	Home Run	2	PullPits C/W Metal Covers (Blank)	White	July 1st, 2018
32	Pit Xformer Hangar	83	Transformer Hangar	Galv. Steel	July 1st, 2018
33	Guidance Signs	4	PullPits C/W Metal Covers (Blank) - (Provisional Item)	White	July 1st, 2018
Airfield Lighting Cable					
35	3Z-0805	3657.6	4-Reels 8-1C 5000v XLPE Airport Series Lighting Cable	Black	July 10th, 2018
36	1A-0801	3500	3.5-Reels 8-1C Soft Drawn SOL Bare Copper	Copper	July 10th, 2018
37	6CL-0807-04	100	1-Reel 8-1C 7 STR BC RW90 XLPE INS. 90C 600V GRN	Green	July 10th, 2018
Poly Tube					
39	522147 / FT.	11000	4-Reels 1-1/4x1000 N-CSA 75 POLY PIPE	Black	July 1st, 2018
Screw Piles					
41	Strobe Beacon	1	9.0m Long C/W 1 Base Flange	Steel	July 1st, 2018
42	Windsocks	2	6.0m Long C/W 2 Base Flange	Steel	July 1st, 2018
43	Guidance Signs	6	4.8m Long C/W 4 Base Channels (Provisional item)	Steel	July 1st, 2018
Beacon Tower					
45	DMXHD-48N	1	6-DELHI TWR Sections DMX 08-03 C/W Climbing Shield CS-8	Galv. Steel	July 10th, 2018
46	Jin Pole	1	DELHI Erection Jin Pole (Available On Loan)	Steel	July 1st, 2018
5.0 Kw 3-Step Constant Current Regulator C/W Cut-Out Switch / ARCAL / Strobe Beacon / Relay Control Panel					
48	CSF6605-4200	1	5.0 Kw 3-Step 240V Input Constant Current Regulator	N/A	Aug 15th, 2018
49	94A0568/30	1	CCR Circuit Breaker Kit	N/A	Aug 15th, 2018
50	94A0654	1	CCR Documentation Pocket Kit	N/A	Aug 15th, 2018
51	94A0263	1	CCR Hour meter Kit	N/A	Aug 15th, 2018
52	94A0128	1	CCR Analogue Voltmeter Kit	N/A	Aug 15th, 2018
53	RCE/1211	1	ARCAL C/W 25m Coaxial Cable and Remote Antenna	Orange	July 11th, 2018
54	FTB-723	1	Flash Technology Strobe Beacon & Controller (120v-60Hz)	N/A	July 12th, 2018
55	6340	50	Strobe Beacon Cable	Black	July 12th, 2018
56	Relay Control Pnl.	1	3 Step 5.0 Kw Regulator and Strobe Beacon C/W Photocell / Manual / Auto Switch	Grey	Aug 15th, 2018
Shipping and Handling					
58	Freight		Shipping and Handling (FOB Elk Point Airport)	N/A	

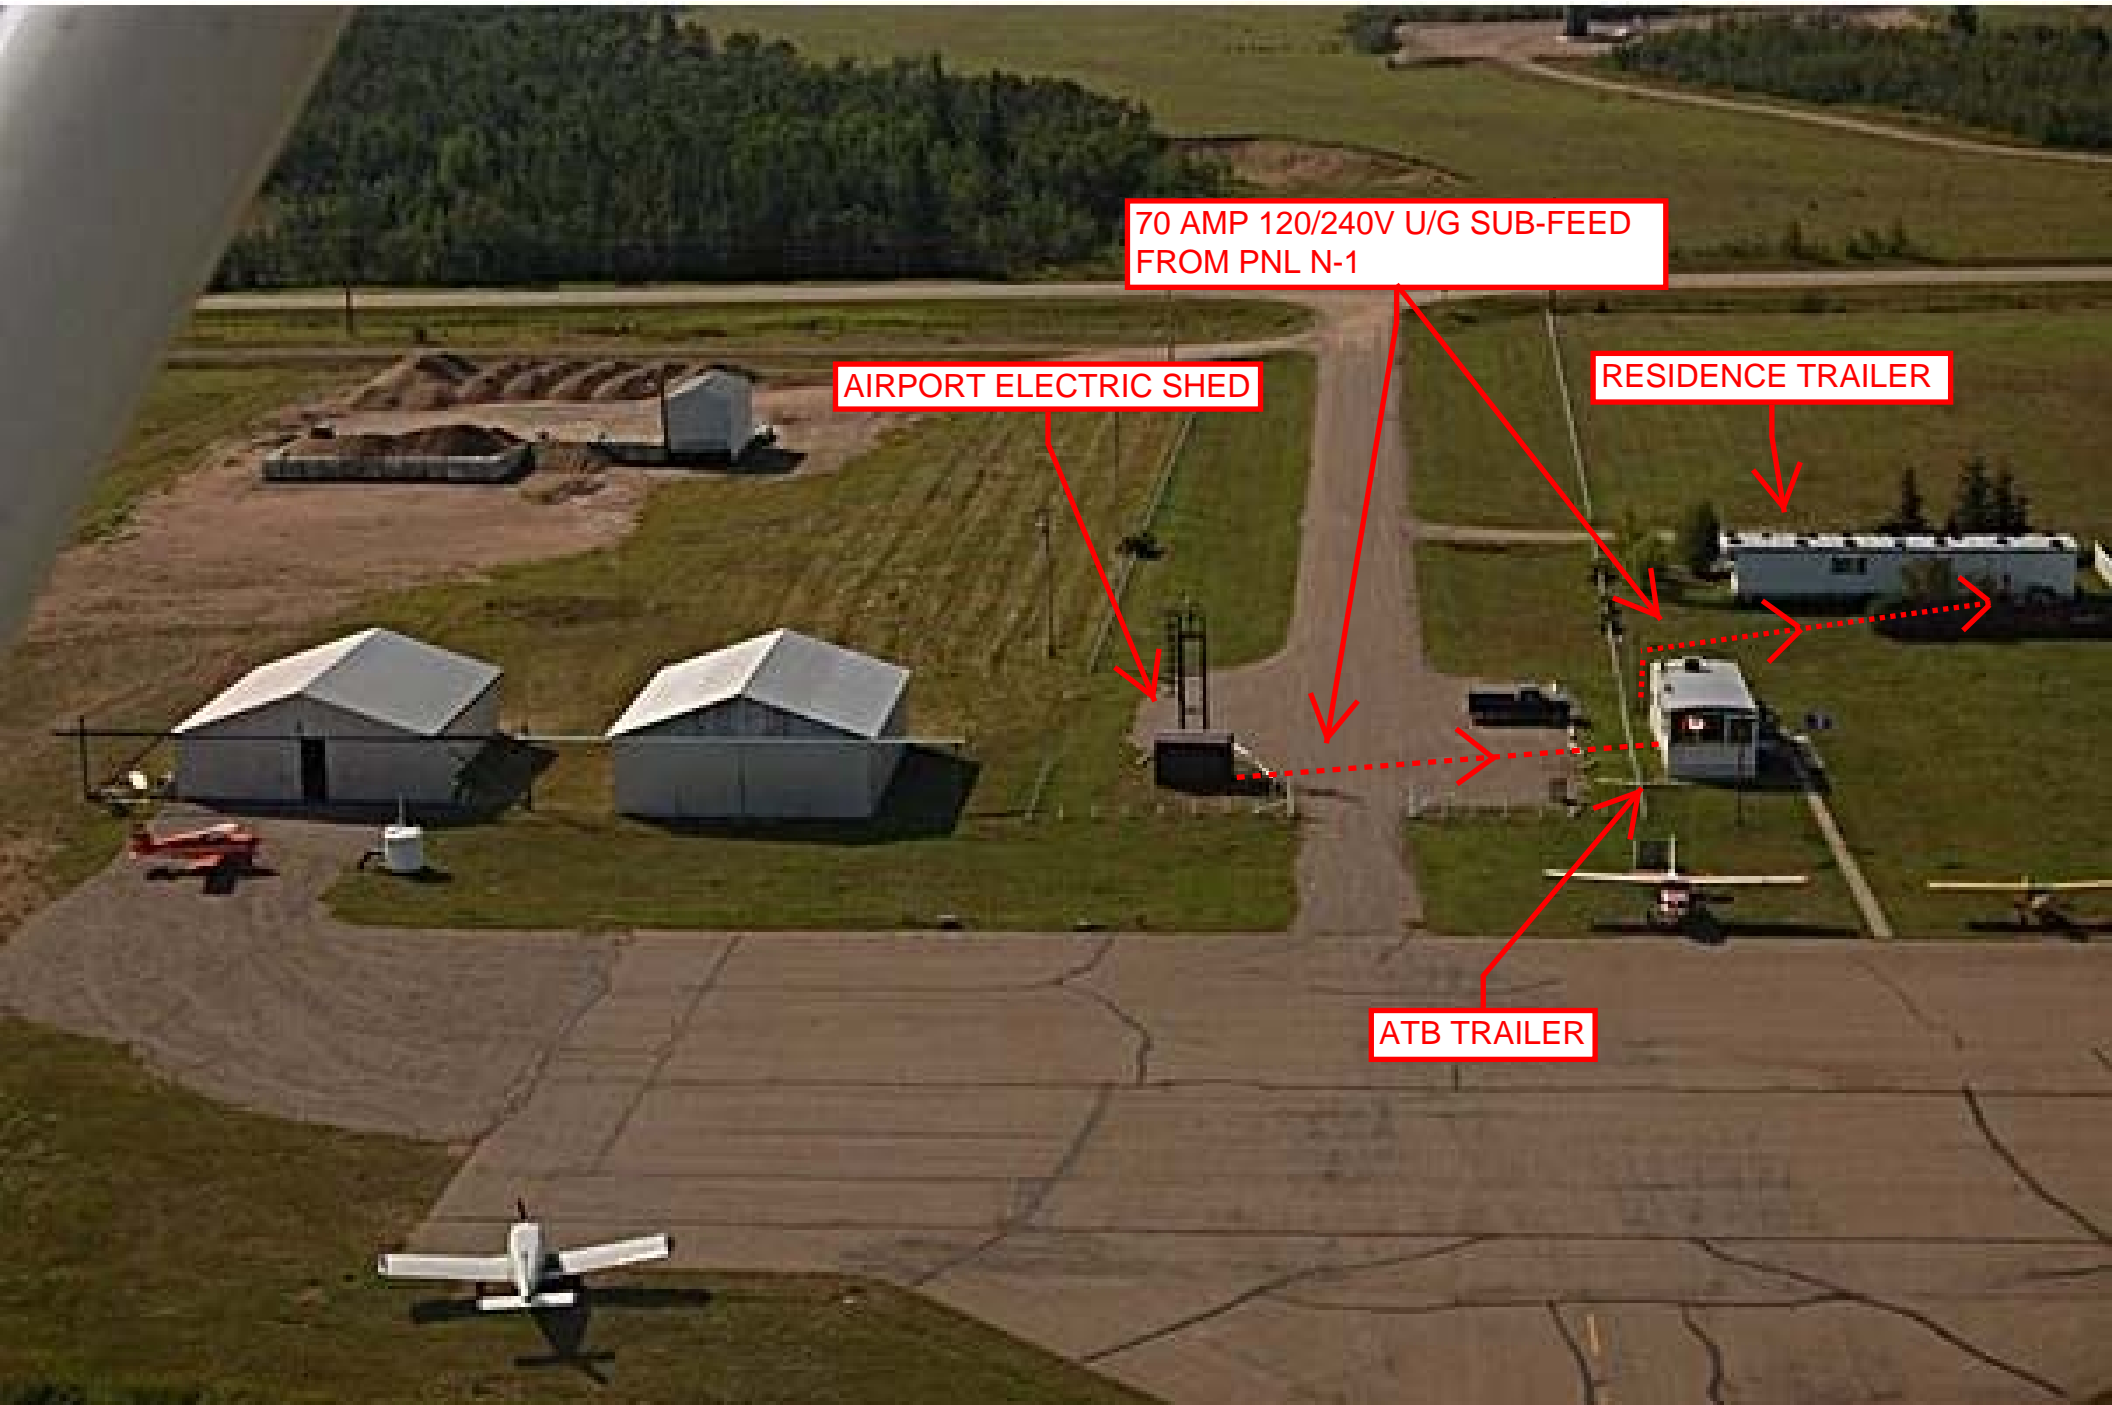


70 AMP 120/240V U/G SUB-FEED FROM PNL N-1

AIRPORT ELECTRIC SHED

RESIDENCE TRAILER

ATB TRAILER

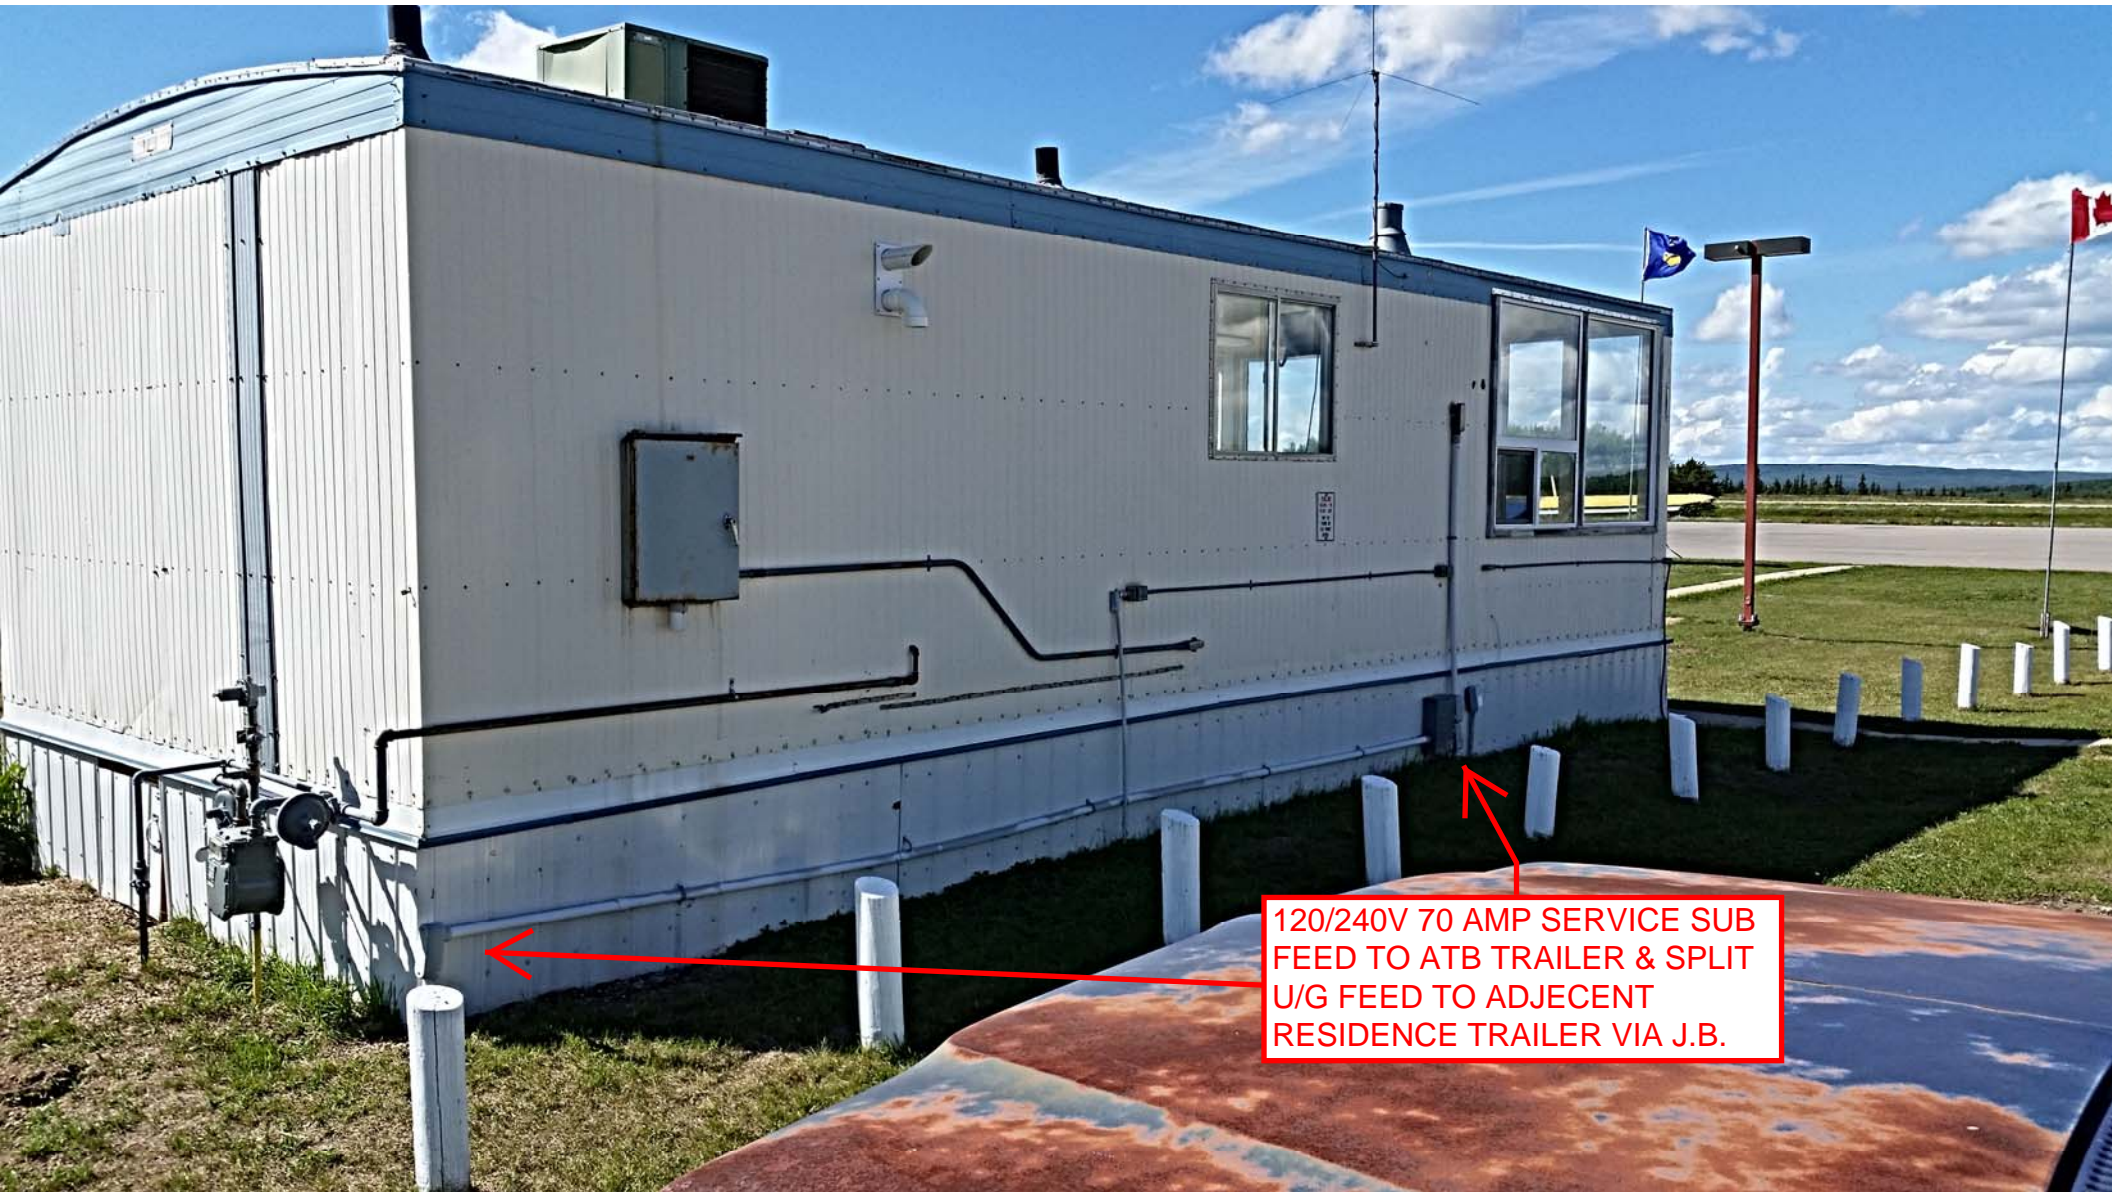

ATB TRAILER